


**DEĞİŞİKLİK  
TEKNİK BÜRO**  
Tarih 16 / 06 / 2014

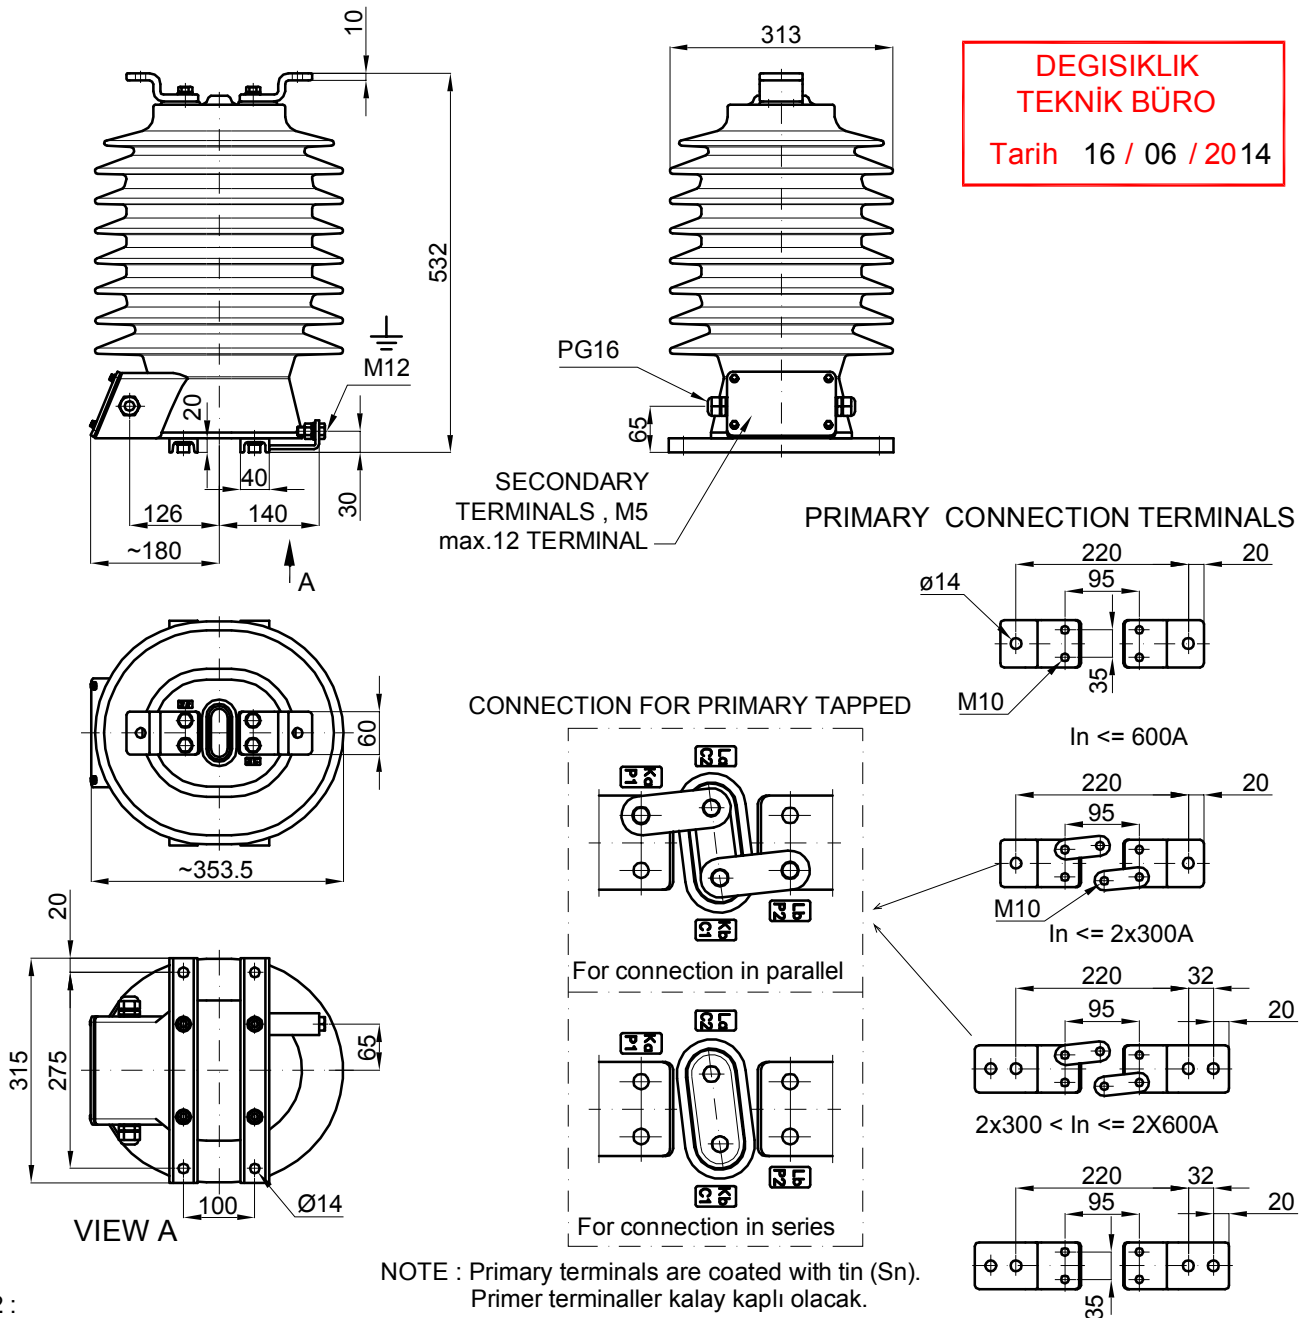

NOTE : Primary terminals are coated with tin (Sn).  
Primer terminaler kalay kaplı olacak.

NOTE-2 :  
 Maximum solar radiation : 1000W/m<sup>2</sup>  
 Maximum wind velocity : 100km/h  
 Maximum relative humidity : %100  
 Ambient temperature : -25°/55°C

The transformer shall not be subjected to "sand storms" when mounted outdoors.  
 Outer protection, such as a protection box, terminal box or cable box which is resistant to sand storms shall be used. Subjection to sand storms voids the guarantee of resin casted transformers.

SCREW	Tightening Torque Nm
M5	2-2,5
M8	16-20
M10	40-50
M12	60-70

QTY	DESCRIPTION	POS	DIMENSIONS	WEIGHT	PART OR DIN NO.	MATERIAL			
						Cycloaliphatic epoxy resin			
	NO	DATE	NAME	MODIFICATION	D	06-06-14	AYŞE	BOX changed	
	A	31-10-05	ARZU	CONNECTION DETAILS ARE ADDED.					
	B	25-11-05	ARZU	NOTE ADDED					
	C	26-04-13	AYŞE	NOTE-2 ADDED					
	TOLERANCES				A32H-2		PLATE CODE	3002468-3002469	
	DIN 7168-g				OUTDOOR CURRENT TRANSFORMER		BOX CODE	3009199	REV.
	SCALE				459		D		
	1/1				REPLACES THE DRAWING NO.		DR'N		
					CH'D				
					APP'D				
					C.C		MT		
	<b>OG Ölçü Trafo</b>								